

Intrinsically Safe - Mining RIPS® SERIES M505	Part Number Coding				
	M505	Travel	A	L	Option 1


Industrial Rotary Sensor

Travel		
degrees rotation	15° to 160°	Value

Electrical Interface Options		
Input		Output
+ 5 V dc	See below	A

Cable		
Cable - Axial Gland IP67	Please specify cable length in cm.	Lxx

OPTIONS		
Housing		
Flanged	Standard option no code	Blank
Servo Mount		P
Tighter Linearity		
± 0.1% Linearity	up to 100°	Z650

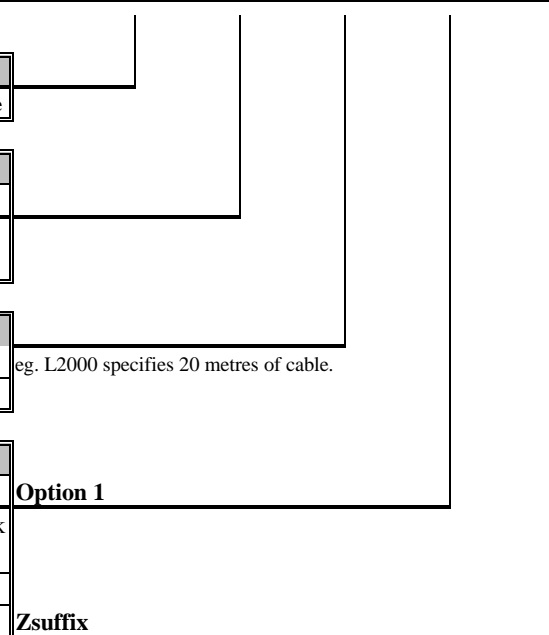

Please Note: This sensor *must* be used with a Galvanic Isolation Amplifier - See X00!