


<b>Intrinsically Safe - Dust</b>  <b>RIPS® SERIES E505</b>	<b>Part Number Coding</b>					
	<b>E505</b>	Travel	<b>A</b>	L/J	Option 1	<b>Z000</b>

**Slim-line Rotary Sensor**

Travel		
degrees rotation	15° to 160°	Value

Electrical Interface Options		
Input	Output	
+ 5 V dc	See below	A

Cable / Connector		
Cable - Axial Gland IP67	Please specify cable length in cm.	LXX
Connector - Axial M8 4 pin IP67		J

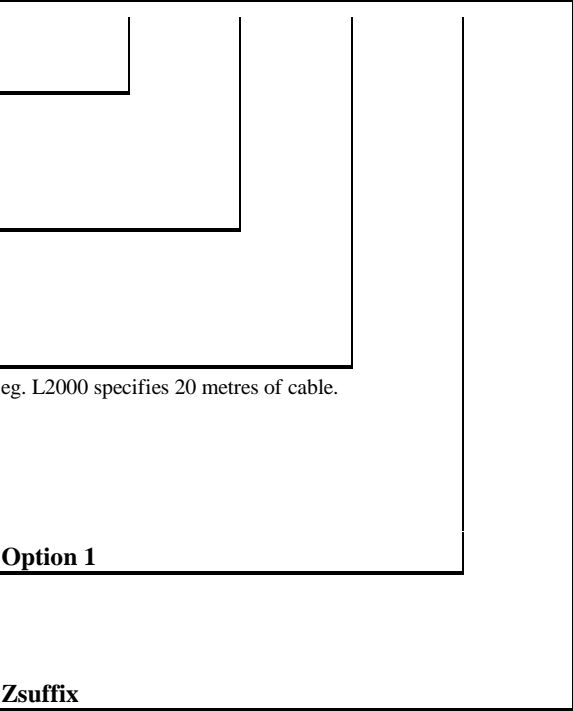

OPTIONS		
Housing		
Flanged	Standard option no code	Blank
Servo Mount		P
Tighter Linearity		
± 0.1% Linearity	up to 100°	Z650

**Please Note: This sensor *must* be used with a Galvanic Isolation Amplifier - See X005**