

Intrinsically Safe - Dust RIPS® SERIES H505	Part Number Coding					
	H505	Travel	A	L/J	Option 1	Z000


Slim-line Rotary Sensor

Travel		
degrees rotation	15° to 160°	Value

Electrical Interface Options		
Input	Output	
+ 5 V dc	See below	A

Cable / Connector		
Cable - Axial Gland IP67	Please specify cable length in cm.	LXX
Connector - Axial M8 4 pin IP67		J

OPTIONS		
Housing		
Flanged	Standard option no code	Blank
Servo Mount		P
Tighter Linearity		
± 0.1% Linearity	up to 100°	Z650

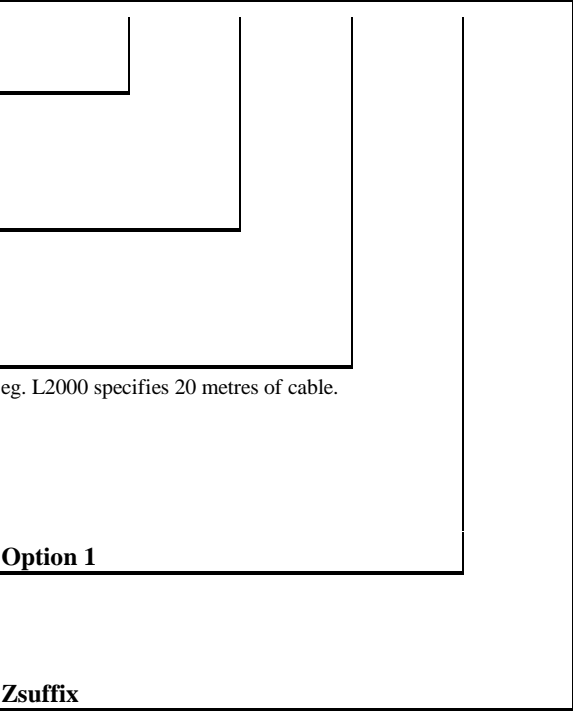

Please Note: This sensor *must* be used with a Galvanic Isolation Amplifier - See G005